


# Inserts

# Conventional

## FPE-3432 Type




## FPE-443\_Type

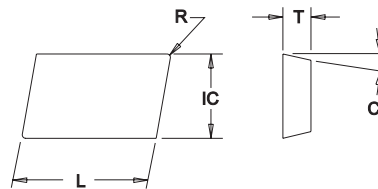

for "GXSM, GXSMH, NXSM, EMX, EMS" Series cutters

Insert Dimensional & Grade Specifications												
Insert Number	IC	L	T	R	C	Coated Grades				Uncoated Grades		
						586XRm	606jRm	LT-50	LT-40	LTC-83	LTC-14	LTC-10
FPE-3432R	0.375	1.00	0.188	0.031	11°		●		●	● ● ● ●		●
FPE-3432RB	0.375	1.00	0.188	0.031	11°			● ● ●				
FPE-4432R	0.500	1.00	0.188	0.031	11°		●			● ● ● ●		●
FPE-4432RB	0.500	1.00	0.188	0.031	11°		●	● ● ●				●
FPE-4434RB	0.500	1.00	0.188	0.062	11°		●	● ● ●				●

## KDE Type

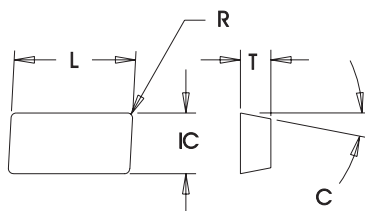

for "LSM" Series cutters

Insert Dimensional & Grade Specifications													
Insert Number	IC	L	T	R	C	Coated Grades					Uncoated Grades		
						586XRm	606jRm	LT-50	LT-45	LT-40	LTC-22	LTC-14	LTC-10
KDE-3332R	0.375	0.75	0.188	0.031	16°						●		●
KDE-3332RB	0.375	0.75	0.188	0.031	16°			● ● ●		●			
KDE-3432R	0.375	1.00	0.188	0.031	16°	● ● ● ●	●		● ● ●			●	● ●
KDE-3432RA	0.375	1.00	0.188	0.031	16°					●			
KDE-3432RB	0.375	1.00	0.188	0.031	16°			● ● ●					

● All Materials

● Cast Iron

● Hardened Materials

● Steel

● Aluminum / Non-Ferrous

● Stainless Steel

● Heat Resistant Super Alloys



Index

Specials

Inserts

General

Cavity Mold

Gray Iron

PCD / CBN

Slotters

Technical Data

Holders